
PAD


CONCRETE

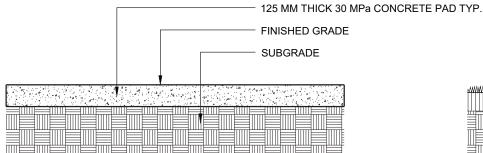

FINISHED GRADE TO BE 12 MM ABOVE LEVEL OF SOD 125 MM THICK 30 MPa CONCRETE PAD TYP. ADJACENT ASPHALT WALKWAY SUBGRADE

CONCRETE BENCH PAD: FRONT SECTION

CONCRETE BENCH PAD: SIDE SECTION

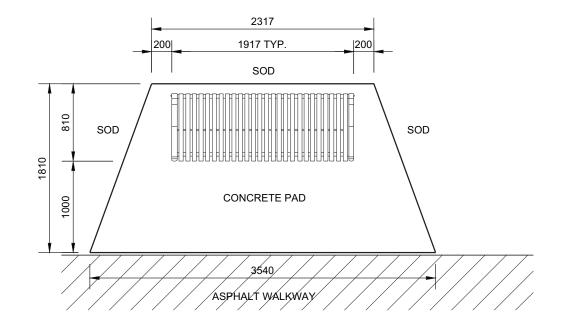

CONCRETE BENCH PAD: PLAN

NOTES:

- 1. INSTALL BENCH AS PER MANUFACTURER'S SPECIFICATIONS. SEE SPECIFICATIONS FOR MODEL AND MANUFACTURER.
- 2. INSTALL BENCHES WITH 10 MM LAG BOLTS AND MATCHING CONCRETE ANCHORED INSERTS.
- 3. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.