




PLATE & OPENING DETAIL



FRONT

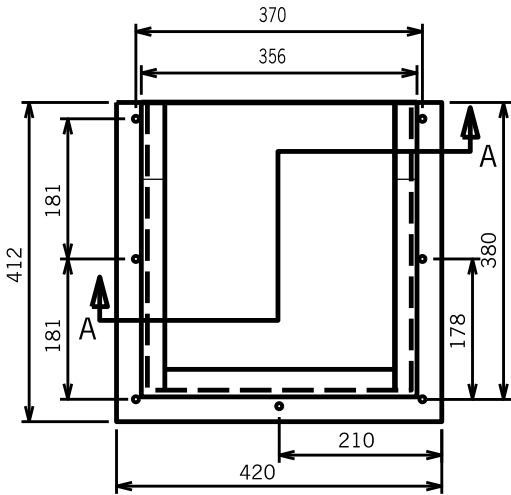


FRAME ELEVATION

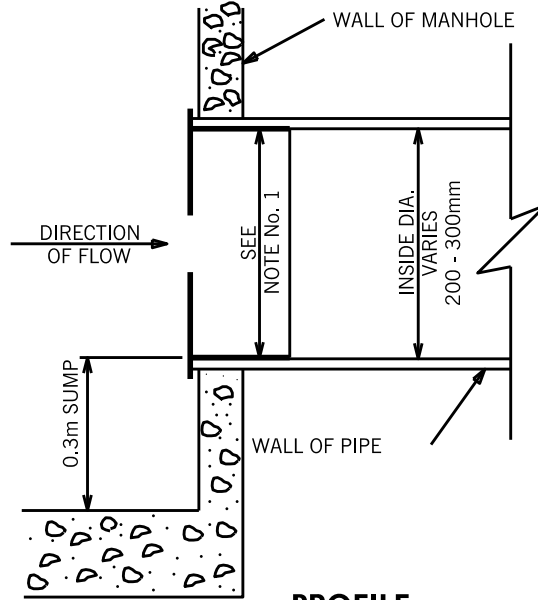

PROFILE


MANHOLE INLET CONTROL DEVICE

(PLUG TYPE)

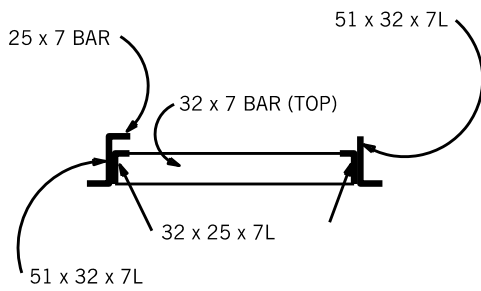

CATCHBASIN INLET CONTROL DEVICE

(SLIDING TYPE)

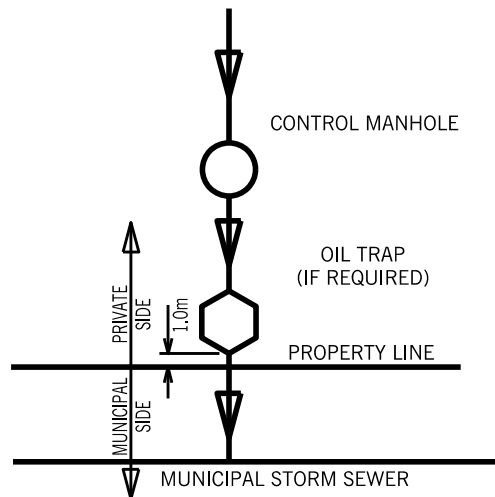

CONTROL MANHOLE LOCATION

NOTES:

1. PVC SLIDING TYPE ORIFICE BY CANADIAN CONTROL DEVICES, OR APPROVED EQUAL.
2. ALL ANGLES, BARS & PLATE TO BE PVC MATERIAL.
3. SECURE TO CATCHBASIN WITH 7-10M 50mm LONG HOT DIP GALVANIZED LAG BOLTS AND WASHERS WITH CINCH ANCHORS.
4. ALL SURFACES TO BE SOLVENT WELDED ARE TO BE TREATED WITH PVC PRIMER PRIOR TO APPLICATION OF PVC SOLVENT WELDING CEMENT.
5. LOCATE IN CATCH BASIN WITH CENTRE OF OPENING AT CENTER OF OUTLET PIPE.
6. SIZE TO BE DETERMINED BY THE DESIGNER AND APPROVED BY THE CITY.

NOTES:

1. PVC PLUG TYPE ORIFICE BY SCEPTER, OR APPROVED EQUAL.
2. ORIFICE HELD IN PLACE BY FRICTION. MADE TO FIT 200,250 AND 300mm PVC AND CONC. PIPE.
3. INVERT OF ORIFICE MUST BE LOCATED ABOVE THE OBVERT ELEVATION OF THE MUNICIPAL SEWER.



BRAMPTON
Flower City

APPROVED:
1991/11/12

REV. 1

INLET CONTROL DEVICES

327

SLIDING TYPE & PLUG TYPE

ORIGINAL:
1990/11/01

N.T.S